
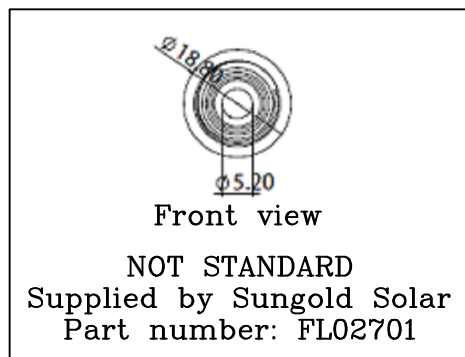


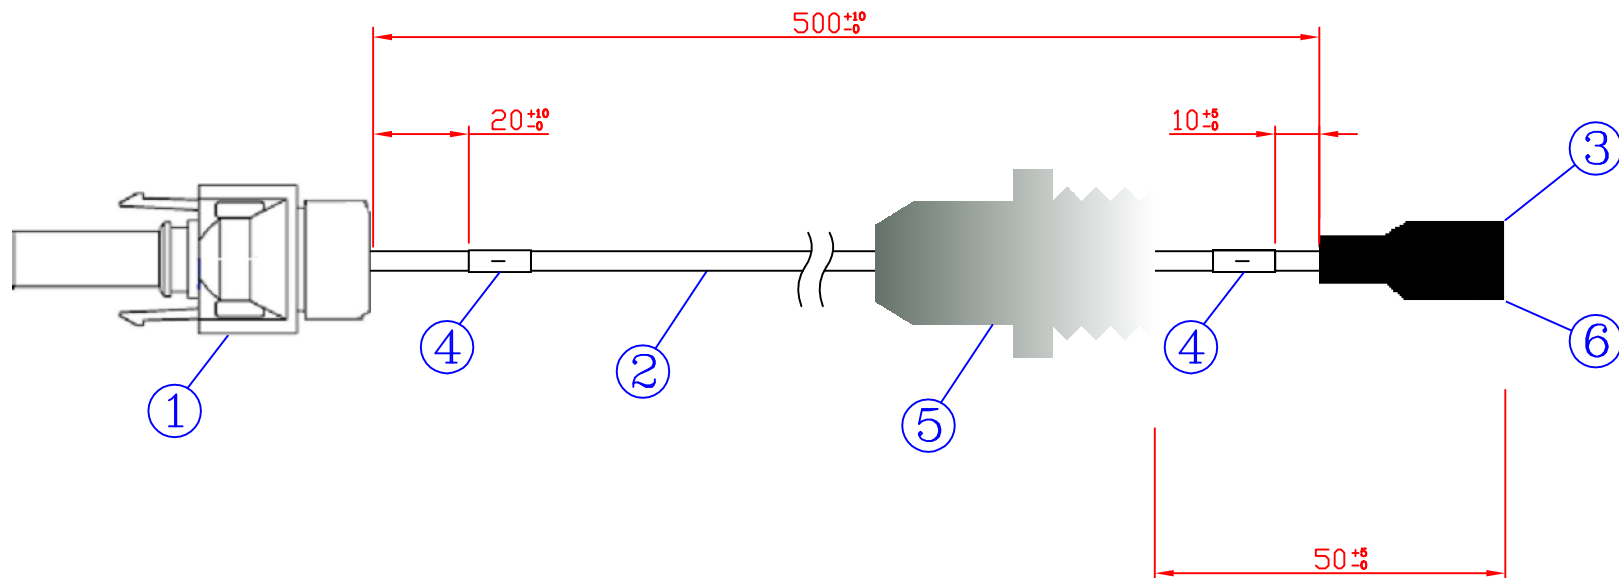

Notes:
Fit the gland and fully
tighten the entry cable.

1	Heat shrink tube	6				
1	Cable Gland M12*1.5 UL IP68 UV Protected	5				
2	Outdoor Marker. Text: -	4				
1	Crimp Receptacle 6.35 x 0.81mm 25 mm ²	3				
1	Cable PV1-F 2.5mm 0.6/1KV	2				
1	Conector MC4 Male	1				
Quantity	Title and Comments	Mark	Norm	Material	Unit	Total Weight
	Date	Name	Rev.	P4Q		
DRAWN BY:	10/06/18	MARTINE TORRE A.	A			
CHECKED BY:						
ϕ	Scale	CABLE POWER(-) PV PANEL			EXTERNAL CABLE SUNTRACK	
TOLERANCE		C16003#02			SIZE	A4
.xx	±0.05				SHEET	1 OF 1
.xxx	±0.1					
ANGLES	±1°					